




















Enclosures	Type	Pol- + PE	Dimensions (mm)													Page 1
			A	B	C	D	E	F	G	H	I	L	M	Art.-Nr.		
	2 Latches	10 pol.	135	95,5	59	29	6	45,5	4,5	67	83	32	37	16614		
		16 pol.	153	115,5	59	29	6	45,5	4,5	88	103	32	37	16624		
		24 pol.	179,5	142,5	59	29	6	45,5	4,5	104	130	32	37	16634		
		32 pol.	153	126	99	35	8	92	4,5	88	110	65	76	16644		
	4 Bolts cover (6-pol.: 2 bolts)	6 pol.	82,5	65	29	6	45,5	4,5	54	70	32	37		16605		
		10 pol.	95,5	74	29	6	45,5	4,5	67	83	32	37		16615		
		16 pol.	115,5	74	29	6	45,5	4,5	88	103	32	37		16625		
		24 pol.	142,5	74	29	6	45,5	4,5	104	130	32	37		16635		
	1 Latch	6 pol.	82,5	74	29	6	45,5	4,5	54	70	32	37		16604		
		10 pol.	95,5	74	29	6	45,5	4,5	67	83	32	37		16614.6		
		16 pol.	115,5	74	29	6	45,5	4,5	88	103	32	37		16624.6		
		24 pol.	142,5	74	29	6	45,5	4,5	104	130	32	37		16634.6		
	1 Latch, cover	6 pol.	82,5	97	29	6	45,5	4,5	54	70	32	37		16604.8		
		10 pol.	95,5	97	29	6	45,5	4,5	67	83	32	37		16614.8		
		16 pol.	115,5	97	29	6	45,5	4,5	88	103	32	37		16624.8		
		24 pol.	142,5	97	29	6	45,5	4,5	104	130	32	37		16634.8		
	1 Latch, cover	48 pol.	167,5	165	40	11	93	6,5	125	148	70	81		16654.8		

Terminal enclosures	Type	Pol- + PE	Dimensions (mm)											Art.-Nr.
			A	B	C	D	E	F	G	H	I	Thread-Ø		
	2 Latches	10 pol.	135	82	93,5	59	57	4	5,5	40	52	2 x M20	16613	
		16 pol.	153	105	117	59	63	4	5,5	45	57	2 x M25	16623	
		24 pol.	179,5	132	144	59	63	4	5,5	45	57	2 x M25	16633	
		32 pol.	153	112	125	98,5	90	5	5,5	67	84	2 x M40	16643	
	4 Bolts, cover													
		10 pol.	82	93,5	74	57	4	5,5	40	52		2 x M20	16613.2	
		16 pol.	105	117	74	63	4	5,5	45	57		2 x M25	16623.2	
		24 pol.	132	144	74	63	4	5,5	45	57		2 x M25	16633.2	
	1 Latch	6 pol.	70	82	74	53	4	5,5	40	52		2 x M20	16603	
		10 pol.	82	93,5	74	57	4	5,5	40	52		2 x M20	16613.6	
		16 pol.	105	117	74	63	4	5,5	45	57		2 x M25	16623.6	
		24 pol.	132	144	74	63	4	5,5	45	57		2 x M25	16633.6	
		32 pol.	112	125	111	90	5	5,5	67	84		2 x M40	16643.6	
	1 Latch cover	6 pol.	70	82	97	53	4	5,5	40	52		2 x M20	16603.8	
		10 pol.	82	93,5	97	57	4	5,5	40	52		2 x M20	16613.8	
		16 pol.	105	117	97	63	4	5,5	45	57		2 x M25	16623.8	
		24 pol.	132	144	97	63	4	5,5	45	57		2 x M25	16633.8	
		32 pol.	112	125	135	90	5	5,5	67	84		2 x M40	16643.8	
		48 pol.	111	141	165	99	7	6,5	106	120		2 x M40	16653.8	




Terminal enclosures also available with greater height and wider tread-diameters.
 Your terminal enclosures are delivered together with the right cable fitting.





Connector housing Cable outlet sideways	Type	Pol- + PE	Dimensions (mm)											Page 2
			A	B	C	D	E	F	G	H	I	Thread-Ø	Art.-Nr.	
	4 Bolts	10 pol.	73	43	52							M20	16618	
		16 pol.	93,5	43	63							M25	16628	
		24 pol.	120	43	63							M25	16638	
		32 pol.	93,5	82,5	94							M40	16648	
	2 Latches	10 pol.	73	135	52	43	59					M25	16619	
		16 pol.	93,5	153	63	43	59					M25	16629	
		24 pol.	120	179,5	63	43	59					M25	16639	
		32 pol.	93,5	153	94	82,5	98,5					M40	16649	
	2 Bolts	6 pol.	60	43	47							M20	16608	
		10 pol.	73	43	52							M20	16618.6	
		16 pol.	93,5	43	63							M25	16628.6	
		24 pol.	120	43	63							M25	16638.6	
		32 pol.	93,5	82,5	94							M40	16648.6	
	1 Latch	48 pol.	121	90	107							M40	16658.6	
		6 pol.	60	43	47							M20	16609.6	

Connector housing Straight cable outlet	Type	Pol- + PE	Dimensions (mm)											Thread-Ø	Art.-Nr.
			A	B	C	D	E	F	G	H	I				
	4 Bolts, increased height	10 pol.	73	43	85							M25	16616.2		
		16 pol.	93,5	43	91							M25	16626.2		
		24 pol.	120	43	91							M32	16636.2		
		32 pol.	93,5	82,5	114							M40	16646.2		
	4 Bolts, standard- height	10 pol.	73	43	58							M20	16616		
		16 pol.	93,5	43	58							M25	16626		
		24 pol.	120	43	68							M25	16636		
	2 Bolts, increased height	6 pol.	60	43	85,5							M25	16606.8		
		10 pol.	73	43	85							M25	16616.8		
		16 pol.	93,5	43	91							M25	16626.8		
		24 pol.	120	43	91							M32	16636.8		
		32 pol.	93,5	82,5	114							M40	16646.8		
		48 pol.	121	90	127							M40	16656.8		
	2 Bolts, standard- height	6 pol.	60	43	53							M20	16606		
		10 pol.	73	43	58							M20	16616.6		
		16 pol.	93,5	43	58							M25	16626.6		
		24 pol.	120	43	68							M25	16636.6		

Connector housing Straight cable outlet	Type	Pol + PE	Dimensions (mm)								Page 3
			A	B	C	D	E	F	G	Thread-Ø	Art.-Nr.
	2 Latches (with gasket)	10 pol.	73	135	59	43	58 (63)			M25	16617 (16617.1)
		16 pol.	93,5	153	59	43	58 (63)			M25	16627 (16627.1)
		24 pol.	120	179,5	59	43	68 (73)			M32	16637 (16637.1)
		32 pol.	93,5	153	98,5	82,5	114 (119)			M40	16647 (16647.1)
	1 Latch, (with gasket)	6 pol.	60	76	53 (75)	43	74			M20	16607 (16607.1)
		10 pol.	73	89	58 (63)	43	74			M25	16617.6 (16617.61)
		16 pol.	93,5	109,5	58 (63)	43	74			M25	16627.6 (16627.61)
		24 pol.	120	136	68 (73)	43	74			M32	16637.6 (16637.61)
		32 pol.	93,5	153	(117)	82,5	111			M40	(16647.61)

These connectors are for use as a coupling also available with gasket (Art.-Nr. Between brackets)

Covers	Type	Pol + PE	Dimensions (mm)								Art.-Nr.
			A	B	C	D	E	F	G	H	
	2 Bolts	6 pol.	60	43	12						16604.1
		10 pol.	73	43	12						16614.1
		16 pol.	93,5	43	12						16624.1
		24 pol.	120	43	12						16634.1
		32 pol.	97	82,5	12						16644.1
	1 Latch, (with gasket)	6 pol.	60	76	43	17,5	74				16606.1
		10 pol.	73	89	43	17,5	74				16616.1
		16 pol.	93,5	109,5	43	17,5	74				16626.1
		24 pol.	120	136	43	17,5	74				16636.1
		32 pol.	97	113	82,5	17,5	111				16646.1
	4 Bolts	10 pol.	73	43	12						16614.1
		16 pol.	93,5	43	12						16624.1
		24 pol.	120	43	12						16634.1
		32 pol.	97	82,5	12						16644.1
	2 Latches, (with gasket)	10 pol.	73	135	43	17,5	59				16616.1
		16 pol.	93,5	153	43	17,5	59				16626.1
		24 pol.	120	179,5	43	17,5	59				16636.1
		32 pol.	97	153	82,5	17,5	98,5				16646.1

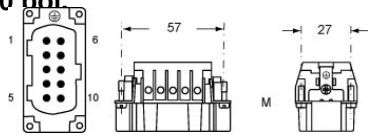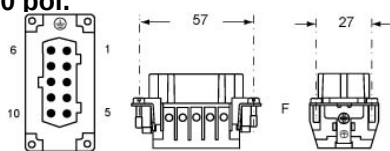			Page 4		
Connector-inserts male	Art.-Nr.		Connector-inserts female	Art.-Nr.	
	125°C	180°C		125°C	180°C
6 pol. 	16602	16602.1	6 pol. 	16601	16601.1
10 pol. 	16612	16612.1	10 pol. 	16611	16611.1
16 pol.	16622	16622.1	16 pol.	16621	16621.1
24 pol.	16632	16632.1	24 pol.	16631	16631.1
32 pol. (1x16 pol. 1-16 + 1x16 pol. 17-32)	16622.32		32 pol. (1x16 pol. 1-16 + 1x16 pol. 17-32)	16621.32	
48 pol. (1x24 pol. 1-24 + 1x24 pol. 25-48)	16632.48		48 pol. (1x24 pol. 1-24 + 1x24 pol. 25-28)	16631.48	